



0 - 200 AMPERES 0 - 600 VOLTS

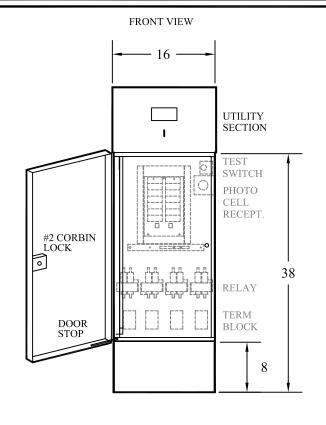

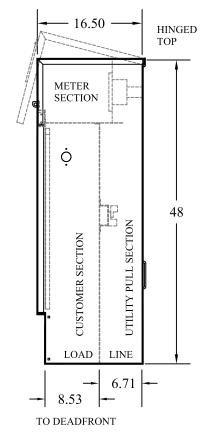

RIGHT SIDE VIEW

14.25 LINE 12.25 LOAD FRONT MOUNTING PLAN

SINGLE METER SERVICE PEDESTAL

TYPICAL APPLICATIONS INCLUDE PARKING LOT LIGHTING, HIGHWAY, STREET AND SIGN LIGHTING AND TRAFFIC SIGNAL CIRCUITS.

STANDARD FEATURES

METER SOCKET 5th clip JAW ASSY
UTILITY LANDING LUGS 250 KCMIL
STANDARD VOLTAGE 120/240VAC 1 PHASE 3 WIRE
CIRCUIT BREAKER INTERIOR COPPER BUS 12 CIRCUIT

STANDARD PEDESTAL OF OLATHE, KANSAS M

MERCURY RELAY AND TERMINAL BLOCK SIZED FOR EACH
LIGHTING CIRCUIT AS REQUIRED
DOOR STOP TO PREVENT CUSTOMER DOOR SWINGING CLOSED
PHOTOELECTRIC SOCKET

SPECIFICATIONS

- * NEMA 3R CONSTRUCTION
- * .125 ALUMINUM NON-ANODIZED

- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL COMPONENTS UL LISTED
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE
- * UTILITY COVERS SEALABLE