


USPDU-MODEL SERIES UL TELCO 0 - 200 AMPERES 0 - 600 VOLTS

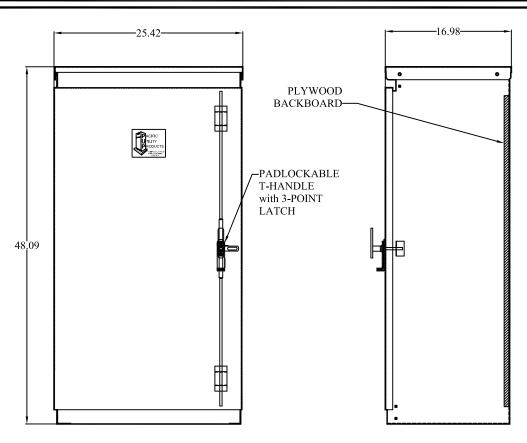

FRONT VIEW

22.25 LINE 5.66 12.25 LOAD 10.84

PLAN VIEW

SIDE VIEW

UNMETERED SERVICE PEDESTAL

TYPICAL APPLICATIONS INCLUDE LIGHTING CONTROLS FOR COURT AND BALLFIELDS; IRRIGATION AND BOOSTER PUMP CONTROLS

STANDARD FEATURES

LANDING LUGS 250kCMIL STANDARD VOLTAGE 120/240VAC 1-PHASE 3-WIRE CIRCUIT BREAKER INTERIOR SIZED FOR JOB SPECIFICATIONS DEADFRONT CONSTRUCTION WHEN REQUIRED

SPECIFICATIONS

- * NEMA 3R CONSTRUCTION
- * POLYESTER POWDER-COATED FINISH EXCEEDS ASTM B-117 SPECIFICATIONS
- * FABRICATED FROM CORROSION-RESISTANT ZINC COATED STEEL
- * AVAILABLE IN ALUMINUM & STAINLESS STEEL

- * LIGHT GREEN COLOR NO. 14672 PER FEDERAL SPECIFICATIONS 595 -
- * ALL FACTORY WIRING 600 VOLT RATED COPPER
- * ALL COMPONENTS UL LISTED
- * ALL EXTERIOR DOORS AND COVERS PADLOCKABLE