


# **MES SERIES**

Mobile Home and Residential Pedestals

Pedestal Type – Underground Installation. Provides metered electrical services suitable for use as residential and mobile home service equipment.

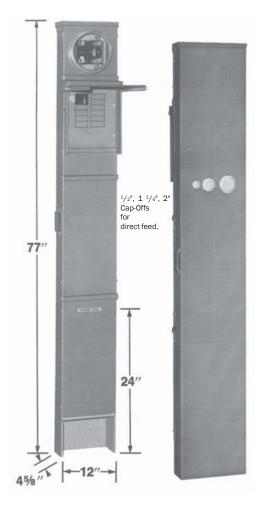

## **FEATURES & SPECIFICATIONS**

- Circuit breaker interior has provisions for twelve full one-inch poles (including main).
- Rating: 200 Amp, 120/240 VAC.
- Interiors will accept plug-in breakers. (GE, Cutler-Hammer, ITE, Crouse-Hinds/Murray.)
- Suitable for use as service equipment and mobile home service equipment.
- Direct feed kits allow load connections from front or rear. For direct feed use Myers direct feed kit, MES-DFK-F (front) or MES-DFK-R (rear). NOTE: Direct feed kits are not included-must be ordered separately.
- Twin 350 MCM line terminals (installed) provide optional loop-feed installation.
- Compression terminal provisions available, add suffix "PPL" to Catalog No. and consult factory for stud termination.
- 14 gauge corrosion resistant steel construction.
- Raintight enclosure.
- One-piece pedestal type unit.
- 2,  $1^{1/4}$  and  $1/{2}$  cap-offs provided in rear of pedestal for direct feed.
- Padlock provision.
- Total unit height is 77". Burial depth is 24". Installed height from ground is 48" to meter center or 53" to top of unit.
- Standard color: foliage green powder coat finish.



Euserc compliant.

Catalog No.	Breaker Panel Configuration	Main Breaker	Optional Accessories (See Reverse)
MES-SE		None	
MES-M100SE		(1) 100 Amp 2 Pole Main	<ul><li>Receptacle Plate Assemblies</li><li>Direct Feed Kits</li><li>Extension Kits</li></ul>
MES-M200SE		(1) 200 Amp 2 Pole Main	

### **OPTIONAL ACCESSORIES FOR MES SERIES**

#### **RECEPTACLE PLATE ASSEMBLY** (FOR MES SERIES WITH STRAIGHT BLADE RECEPTACLES)





#### Features:

atures:	<u>Catalog No.</u>	<b>Receptacles</b>
Receptacles pre-wired.	MES-RPA-2	(1) 20 Amp 5-20R Duplex
No circuit breakers	MES-RPA-22	(2) 20 Amp 5-20R Duplex
included.	MES-RPA-3	(1) 30 Amp 10-30R
Pre-drilled and pre-wired (cut to length) receptacle	MES-RPA-32	(1) 20 Amp 5-20R Duplex (1) 30 Amp 10-30R
plate assemblies provides quick and economical	MES-RPA-33	(2) 30 Amp 10-30R
installation.	MES-RPA-5	(1) 50 Amp 14-50R
Receptacle plate	MES-RPA-52	(1) 20 Amp 5-20R Duplex
assemblies available with	MES-RPA-55	(2) 50 Amp 14-50R
the various receptacle combinations listed.	MES-RPA-532	(1) 50 Amp 14-50R (1) 30 Amp 10-30R
Fits all MES and MES1		(1) 20 Amp 5-20R Duplex
Series devices.	MES-RPA-552	(2) 50 Amp 14-50R (1) 20 Amp 5-20R Duplex

MES-RPA-555

(3) 50 Amp 14-50R

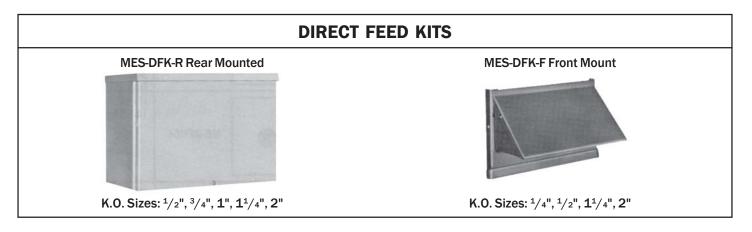

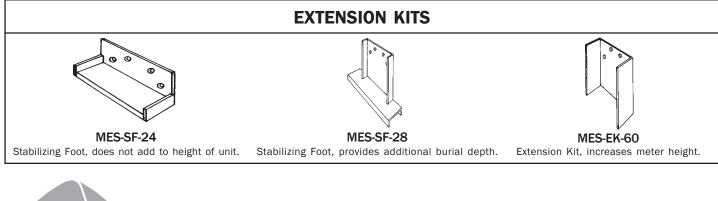



Tel: 866-MY-MYERS Fax: 951-520-1961 www.myerspowerproducts.com